
- 9 5/8 🏝 - 3 3/4 ---<del>-</del> - 1/2-13 UNC **TAPPED HOLE --** 7/8 ▲ (BASE PLATE) 3/4 DIA HOLE (2 TYP. VIEW CUT-AWAY FOR CLARITY, LIMIT STOP ◬ NOT SHOWN) 4 1/4 1 3/4 🛦

I	REV.	DESCRIPTION	DATE	BY
•				

TYPE MH-3D SPRING ISOLATORS WITH INTERNAL ADJUSTMENT				
MODEL	MAX LOAD	DEFLECTION	SPRING RATE	SPRING
MODEL	(LBS)	(IN)	(LB/IN)	COLOR CODE
MH-3D-800	800	3.00	267	DK GRAY
MH-3D-1225	1225	2.94	417	RED
MH-3D-1510	1510	2.52	600	MED GRAY
MH-3D-2035	2035	2.54	800	DK YELLOW



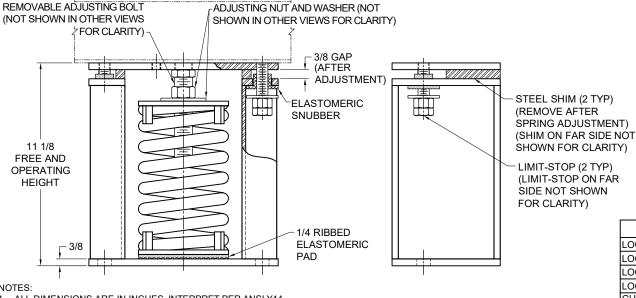

(3) (5) (8) (4) (6)

ISOLATOR SELECTIONS		
LOC 1:	LOC 2:	
LOC 3:	LOC 4:	
LOC 5:	LOC 6:	
LOC 7:	LOC 8:	
CUSTOMER EQP'T. TAG:		

NOTE: MATERIAL SHOWN IS FOR (1) SET.

## 1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.

- 2. UNLESS OTHERWISE NOTED. DIMENSIONS FOR STYLE APPLY TO ALL OTHER STYLES.
- 3. FINISH: HOUSINGS- POWDER COAT, SPRINGS- POWDER COAT, HARDWARE- ZINC ELECTROPLATE.
- 4. REFER TO SHEET 2 OF 2 FOR INSTALLATION INSTRUCTIONS.
- 5. INNER SPRING (WHEN USED) NOT SHOWN.

120R-101724

REV.:7

2/3/22

- ALL SPRINGS ARE DESIGNED WITH 50% OVER TRAVEL.
- SPRING PACKAGE MAY BE REMOVED WITH SHIMS IN PLACE. CONTACT A FACTORY REPRESENTATIVE FOR SPRING REMOVAL INSTRUCTIONS.

8 DIMENSIONS APPLY TO BOTH TOP BOLT DOWN AND BASE PLATE ANCHORING HOLE.

9. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.


OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:		I // \	SCALE : NONE	_	
JOB NAME:	MODEL MH-3D 800-2035 LBS.		SHEET:	<del>VISCM</del>	
CUSTOMER:	SPRING ISOLATORS WITH INTERNAL ADJUSTMENT	VMC	1 OF 2		
CUSTOMER P.O.:	3 INCH DEFLECTION	GROUP THE POWER OF TOGETHER*	DRAWING NO.:		REVISIO
SALES ORDER:		Bloomingdale, NJ 07403 Houston, TX 77041			

120R-101724 REV.:7 2/3/22 REV. DESCRIPTION DATE BY

## READ INSTRUCTIONS IN THEIR ENTIRETY BEFORE BEGINNING.

- 1. LOCATE ISOLATORS UNDER EQUIPMENT AFTER DETERMINING POSITIONS DESIGNATED IN THE THE VMC GROUP SUBMITTAL, SHEET 1
- 2. ALL LIMIT BOLTS ARE FACTORY SET AND BONDED IN PLACE. THE SHIPPING NUT ON THE LIMIT BOLT MUST BE LOWERED UNTIL IT TOUCHES THE BOLT HEAD. THE NUT WAS SHIPPED IN THE RAISED POSITION. DO NOT ATTEMPT TO READJUST THE LIMIT BOLTS. FACTORY SETTING ASSURES UNIFORM BOLT LOADING IF UPLIFT OCCURS, AS IN THE CASE OF A COOLING TOWER BEING DRAINED.
- 3. THE VMC GROUP RECOMMENDS BOLTING ALL ISOLATORS TO A FLAT SURFACE. WHEN A WEIGHT CHANGE OCCURS IN EXCESS OF 20% OF EQUIPMENT OPERATING WEIGHT, THE ISOLATOR BASE PLATE **MUST** BE BOLTED. THE LOAD MUST BE CENTERED ON THE ISOLATOR TO AVOID ECCENTRIC LOADING OF TOP PLATE, WHICH WOULD TILT THE TOP PLATE OF THE ISOLATOR. THE TOP PLATE OF THE ISOLATOR MUST BE UNIFORMLY LOADED ACROSS ENTIRE LENGTH OF TOP PLATE OR THE EQUIPMENT MUST BE BLOCKED UNTIL LOAD IS TRANSFERRED TO THE ISOLATOR. THE VMC GROUP MUST BE ADVISED BEFORE THE ISOLATORS ARE RELEASED FOR PRODUCTION TO EVALUATE ANY VARIANCE TO THESE REQUIREMENTS.
- 4. WHEN THE APPLICATION IS OUTDOORS AND THE EQUIPMENT WILL BE SUBJECT TO HIGH WINDS, THE OWNER'S REPRESENTATIVE MUST EVALUATE ANCHOR TYPE AND SIZE TO EFFECTIVELY RESIST WIND FORCES. TYPE MH ISOLATORS ARE RESTRICTED TO LOW SEISMIC AND WIND APPLICATIONS, STEEL ATTACHMENT ONLY. USE VMC GROUP TYPE MS ISOLATORS TO ISOLATE EQUIPMENT THAT WILL BE SUBJECT TO SEISMIC AND WIND FORCES WITH CONCRETE ATTACHMENT.
- ISOLATORS ARE SHIPPED TO THE JOB SITE WITH SHIMS BETWEEN THE TOP PLATE AND HOUSING. THESE SHIMS MUST BE IN PLACE WHEN ISOLATOR IS POSITIONED UNDER EQUIPMENT.
- 6. THE ADJUSTMENT PROCESS CAN ONLY BEGIN AFTER FULL OPERATING WEIGHT IS REACHED. THE ADJUSTMENTS CAN BE MADE BY STARTING AT ANY ISOLATOR AND TURNING THE ADJUSTING NUT CLOCKWISE TWO TURNS. PROCEED AROUND THE EQUIPMENT TO EACH ISOLATOR ADJUSTING EACH TWO TURNS TO COMPRESS THE SPRINGS UNIFORMLY. CONTINUE THIS ADJUSTING PROCESS UNTIL ONE ISOLATOR JUST RISES OFF THE SHIMS. STOP ADJUSTMENT ON THAT AND OTHER ISOLATORS AS THEY RISE OFF SHIMS APPROXIMATELY 1/32". WHEN ALL ISOLATORS HAVE RISEN ABOVE THE SHIMS, THE ADJUSTMENT PROCESS IS COMPLETE. REMOVE ALL SHIMS.
- 7. FURTHER ATTENTION TO THE INSTALLATION IS NOT NORMALLY REQUIRED. THE VMC GROUP SUGGESTS A SEMIANNUAL INSPECTION OF THE COMPONENTS FOR POSSIBLE CORROSION PROBLEMS. IF PROBLEMS ARE OBSERVED, CONSULT THE VMC GROUP OR CORROSION CONTROL EXPERTS TO RECTIFY THE PROBLEM.
- IF THE SPRING PACKAGE MUST BE REMOVED, CONTACT FACTORY REPRESENTATIVE FOR DETAILED PROCEDURE.

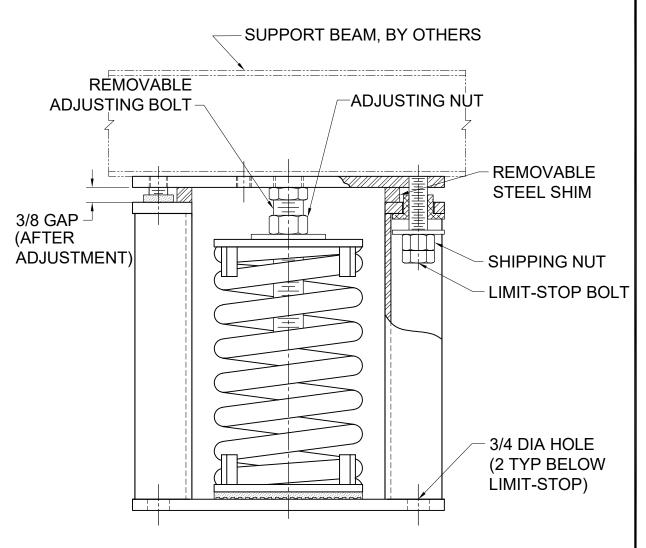

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

I	CERTIFIED FOR:		· · · · · · · · · · · · · · · · · · ·	NONE	•	
I	JOB NAME:	MODEL MH-3D 800-2035 LBS.		SHEET:	d m e M	EMA
I	CUSTOMER:	SPRING ISOLATORS WITH	VMC	2 OF 2		
	CUSTOMER P.O.:	INTERNAL ADJUSTMENT 3 INCH DEFLECTION	GROUP THE POWER OF TOGETHER*	DRAWING NO.:		REVISIO
l	SALES ORDER:		Bloomingdale, NJ 07403 Houston, TX 77041			