


204R-103368 REV.: 3


REV.	DESCRIPTION	DATE	BY

MODEL NO.	MAX UNIFORM LOAD (LBS.)	DEFLECTION (IN.)	VERTICAL DYNAMIC FREQUENCY AT MAX. LOAD
MWIP 1	13000	0.10	12 HZ

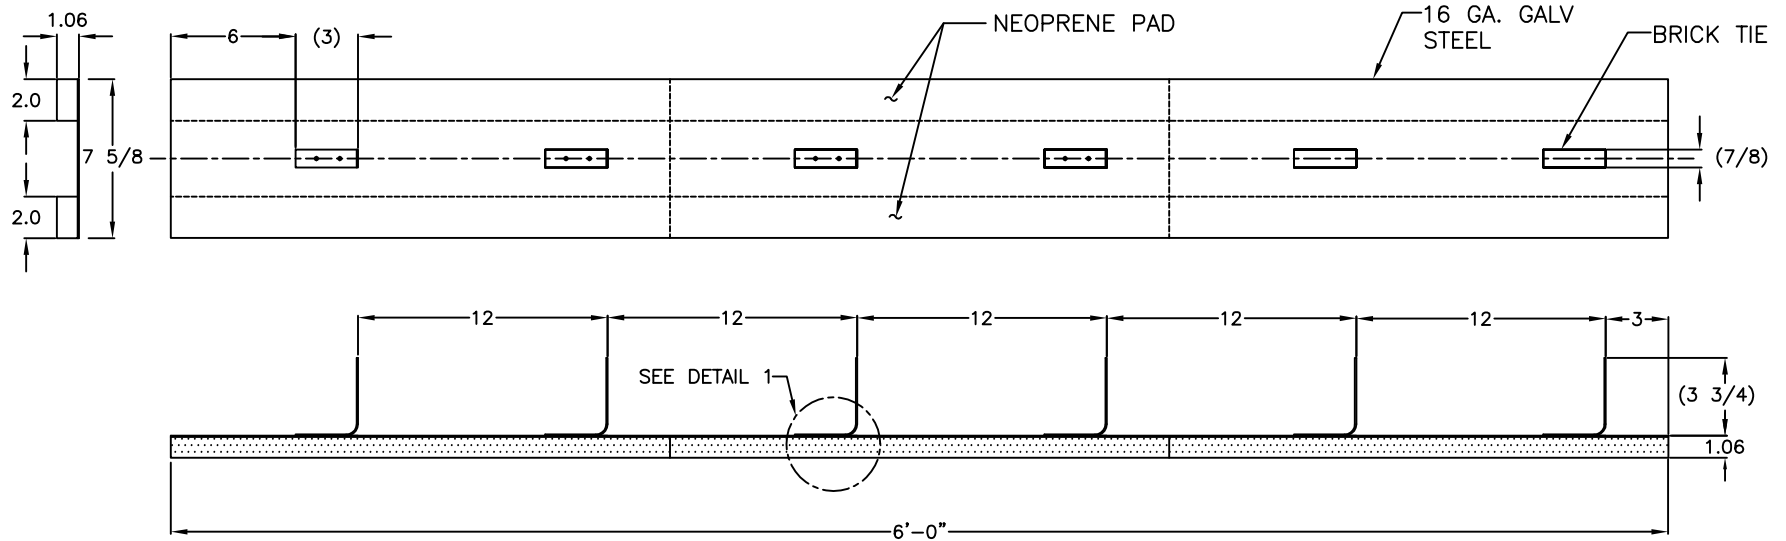

NOTES:

1. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
2. MATERIALS: ELASTOMER-BRIDGE BEARING NEOPRENE SHEET METAL AND BRICK TIES-GALVANIZED STEEL

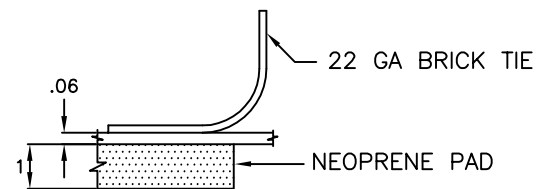

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER : \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

MODEL MWIP1 13000 LBS.  
 MASONRY WALL  
 ISOLATION PAD



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION