


119R–100271	REV.:11	10/20/26

REV.	DESCRIPTION	DATE	BY

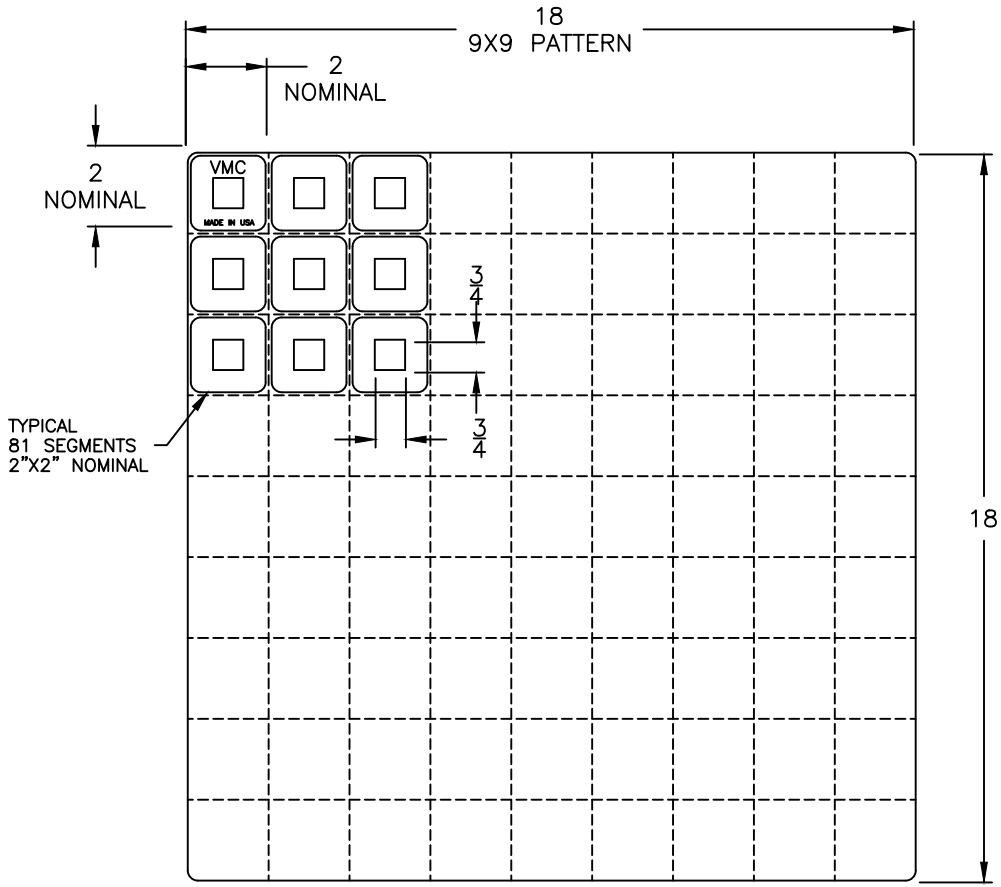

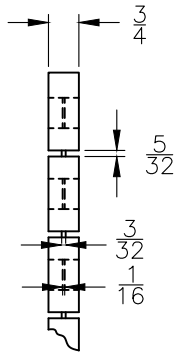

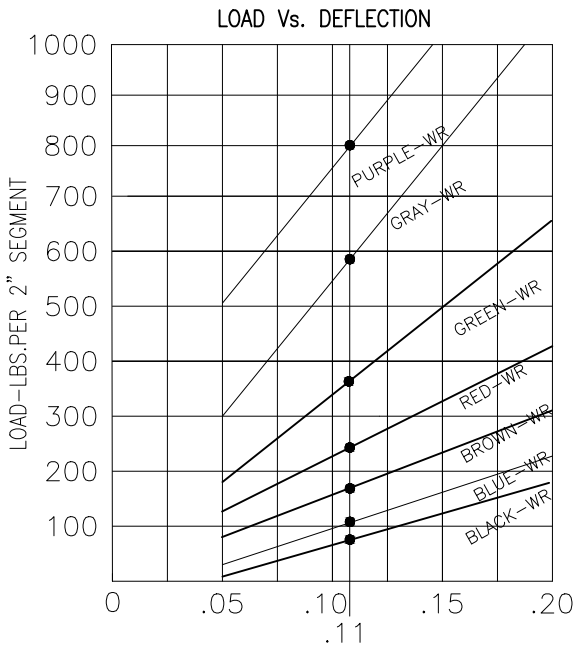

PART NUMBER	MODEL DESIGNATION	RATED COMPRESSIVE LOAD ON 2"X2" SEGMENT(LBS.)
119A-100270-00	MAXI-FLEX BLACK-WR	90
119A-100270-01	MAXI-FLEX BLUE-WR	120
119A-100270-02	MAXI-FLEX BROWN-WR	180
119A-100270-03	MAXI-FLEX RED-WR	240
119A-100270-04	MAXI-FLEX GREEN-WR	360
119A-100270-05	MAXI-FLEX GRAY-WR	580
119A-100270-06	MAXI-FLEX PURPLE-WR	800

NOTES:
1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
3. MOLDED ELASTOMER PAD, SECTIONABLE BY CUSTOMER, RESISTANT TO MODERATE OUTDOOR ENVIRONMENTS, CONSULT VMC FOR APPLICABILITY.
4. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONTACT THE VMC GROUP FOR APPLICABILITY.
5. RATED LOAD PROVIDES 15% (0.11 INCH) DEFLECTION.
6. FOR INCREASED DEFLECTION, MAXI-FLEX CAN BE STACKED WITH 16 GAUGE SHIMS SEPARATING THE LAYERS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME:

CUSTOMER :

CUSTOMER P.O.:

SALES ORDER:

MODEL MAXI-FLEX 90-800 LBS. DURULENE 2 SQUARE INCH ELASTOMERIC PAD

VMC GROUP
THE POWER OF TOGETHER
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE : NONE

SHEET: 1 OF 1

Member VISCMA

DRAWING NO.:

REVISION

PROPRIETARY: EXCEPT AS OTHERWISE AGREED IN WRITING, THE INFORMATION AND DESIGN DISCLOSED HEREIN ARE THE PROPERTY OF THE VMC GROUP AND MUST NOT BE COPIED OR DISTRIBUTED OUTSIDE THE VMC GROUP EXCEPT TO AUTHORIZED PERSONS WITH A GENUINE NEED TO KNOW WHO BY THE USE HEREOF ACKNOWLEDGE THE VMC GROUP'S OWNERSHIP AND AGREE TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.