
225R-103879 REV.:2 3/23/23

NOTES:

1.


2.

3.

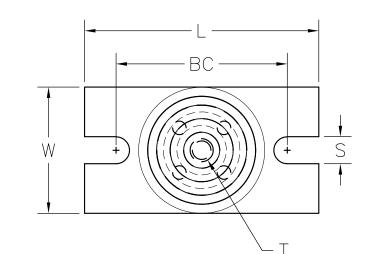

			MOD		LOAD APACITY POUNDS)	DEFLECTION (INCHES)	COLOF	
			NCM	11	80-125	1/3	GREEN	40
SIZE	L	W	/	Н	MD	BC	S	Т
NCM1	3 1/4	13	/4	1 5/8	1 1/2	2 3/8	3/8	5/16-18UNC


REV.




ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.

CONSULT VMC FOR APPLICABILITY.

MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, FOR SERVICE CONDITIONS.





DESCRIPTION

DATE

BY

ISOLATOR SELECTIONS					
LOC 1:	LOC 2:				
LOC 3:	LOC 4:				
LOC 5:	LOC 6:				
LOC 7:	LOC 8:				
CUSTOMER EQP'T. TAG:					

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR

NOTE: MATERIAL SHOWN IS FOR (1) SET.

PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE. SCALE : **CERTIFIED FOR:** NONE JOB NAME: MODEL NCM 80-125 LBS. SHEET: ELASTOMERIC ISOLATOR 1 OF 1 VMC CUSTOMER : 0.35 DEFLECTION GROUP DRAWING NO .: REVISION CUSTOMER P.O.: THE POWER OF TOGETHER" Bloomingdale, NJ 07403 SALES ORDER: Houston, TX 77041

PROPRIETARY: EXCEPT AS OTHERWISE AGREED IN WRITING, THE INFORMATION AND DESIGN DISCLOSED HEREIN ARE THE PROPERTY OF THE VMC GROUP AND MUST NOT BE COPIED OR DISTRIBUTED OUTSIDE THE VMC GROUP EXCEPT TO AUTHORIZED PERSONS WITH A GENUINE NEED TO KNOW WHO BY THE USE HEREOF ACKNOWLEDGE THE VMC GROUP'S OWNERSHIP AND AGREE TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.