



PART NUMBER	MODEL	RATED AXIAL LOAD (LBS)	DEFLECTION (IN)
330620	R2-BLUE	135	0.25
330523	R2-BLACK	170	0.25
330426	R2-RED	240	0.25
330329	R2-GREEN	380	0.25
330221	R2-GRAY	550	0.25

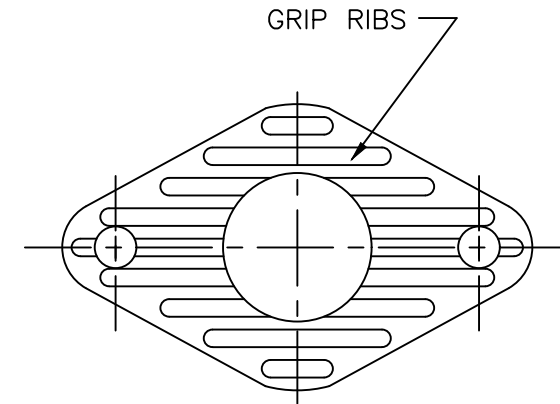

VIEW "A-A"

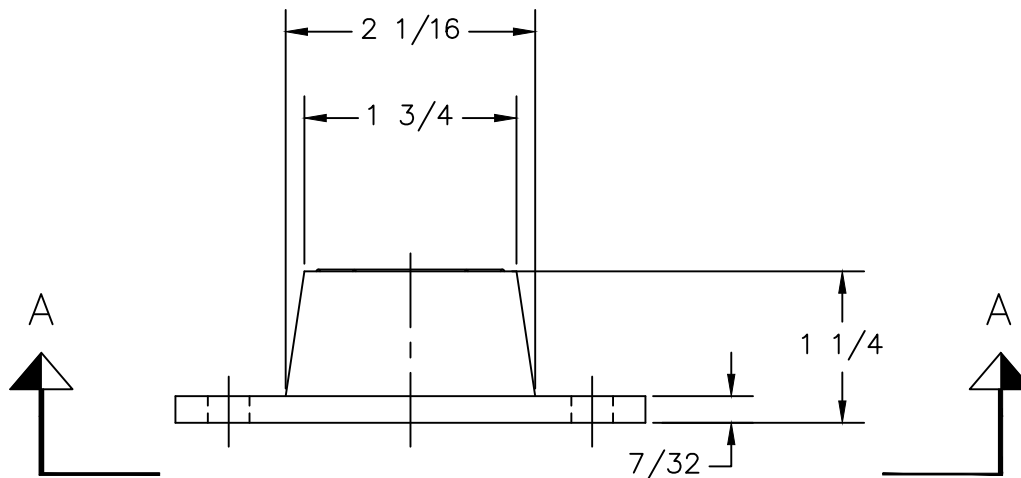

NOTES:

1. ALL DIMENSIONS ARE NOMINAL IN INCHES. INTERPRET PER ANSI Y14.
2. MOLDED STEEL AND ELASTOMERIC ISOLATOR FOR NON FAIL SAFE, SERVICE CONDITIONS. CONTACT THE VMC GROUP FOR APPLICABILITY.
3. MODEL COLORS ARE ACTUAL MOUNT COLOR IN ADDITION TO MODEL TYPE STAMPING.
4. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONTACT THE VMC GROUP FOR APPLICABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL R2 135-550 LBS.
ELASTOMERIC ISOLATOR
0.25 INCH DEFLECTION



VMC
GROUP

THE POWER OF TOGETHER

Bloomington, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

Member
VISCMA