

DESCRIPTION 110R-105154 REV.:2 12/06/23 DATE

PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADICAL STATIC LOAD MAX LBS.	DUROMETER ± 5	COLOR MARKING	MATERIAL
RB3-700EHT	RB3-700EHT	700	300	60	BLUE	EHT SILICONE

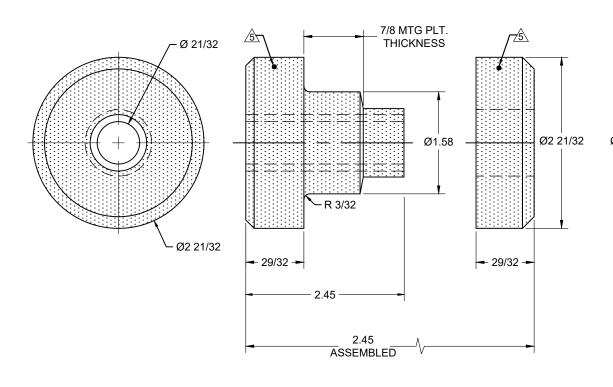



-RB3-700EHT 2000 POUNDS 1500 LOAD 1000

## .02 .04 .06 .08 .10 .12 .14 .16 .18 **DEFLECTION IN INCHES**

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

## NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
- SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
  - FINISH: YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED.
- COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING.
- 6. 21/32" HOLE FOR 5/8" BOLT
- 7. PRODUCT COLOR IS ORANGE-RED WHICH DIFFERS FROM COLOR MARKING.

**CERTIFIED FOR:** 

SALES ORDER:

8. PRODUCT EDGING & FINISHING PER INDUSTRY STANDARD.



MODEL RB3 EHT SILICONE 700 LBS. JOB NAME: **EXTREME HIGH TEMPERATURE** CUSTOMER:\_ RING AND BUSHING CUSTOMER P.O.: **ELASTOMERIC ISOLATOR** 

500

THE POWER OF TOGETHER

Bloomingdale, NJ 07403 Houston, TX 77041

SCALE:	
NONE	Member
SHEET:	W-VISEMA
1 OF 1	
DRAWING NO.:	REVISIO

PROPRIETARY: EXCEPT AS OTHERWISE AGREED IN WRITING, THE INFORMATION AND DESIGN DISCLOSED HEREIN ARE THE PROPERTY OF THE VMC GROUP AND MUST NOT BE COPIED OR DISTRIBUTED OUTSIDE THE VMC GROUP EXCEPT TO AUTHORIZED PERSONS WITH A GENUINE NEED TO KNOW WHO BY THE USE HEREOF ACKNOWLEDGE THE VMC GROUP'S OWNERSHIP AND AGREE TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.