


# CA8 SERIES

## 1/4" WIRE ROPE

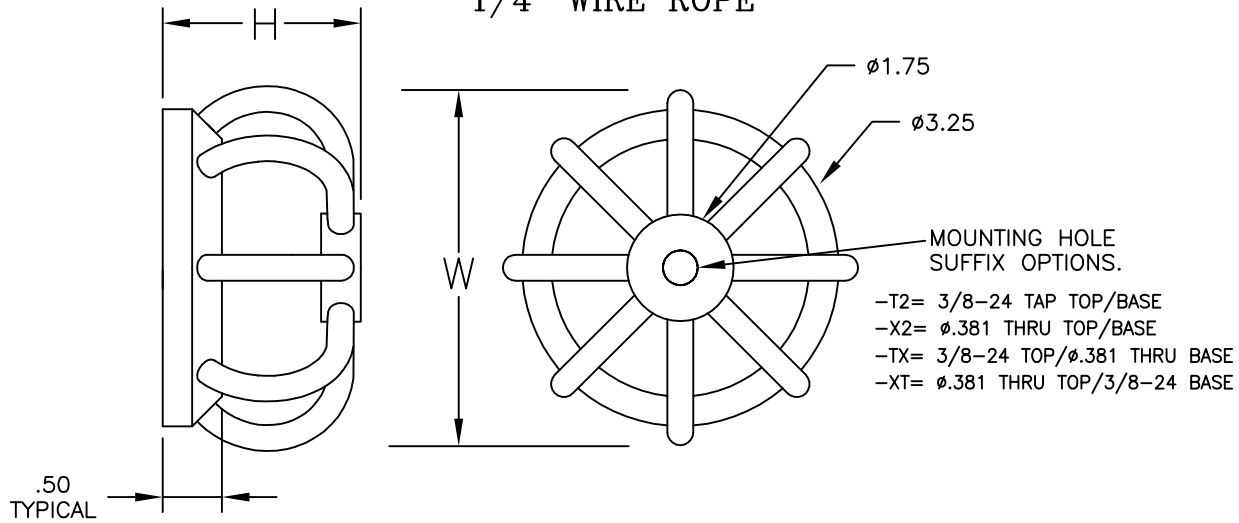

\* CROSSED CABLE NOT PICTURED

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H $\pm$ .06	W(REF)				
CA8-250-08-[ ]	1.65	3.50	COMPRESSION	1785	3680	.35
			SHEAR	790	730	.40
			45 DEG. C/R	885	2370	.65
CA8-300-08-[ ]	2.13	3.75	COMPRESSION	1060	2260	.45
			SHEAR	460	430	.60
			45 DEG. C/R	440	1450	.95
CA8-350-08-[ ]	2.50	4.25	COMPRESSION	405	840	.60
			SHEAR	150	190	.90
			45 DEG. C/R	205	570	1.20
CAX8-[ ] (CROSSED CABLE)	2.00	4.40	COMPRESSION	470	1490	.55
			SHEAR	280	310	.80
			45 DEG. C/R	240	800	1.10

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL CA8 SERIES  
 ALUMINUM ARCH WIRE ROPE  
 ISOLATOR**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE: NONE  
 SHEET: \_\_\_\_\_



DRAWING NO.: \_\_\_\_\_ REVISION: \_\_\_\_\_