


CB1600 SERIES

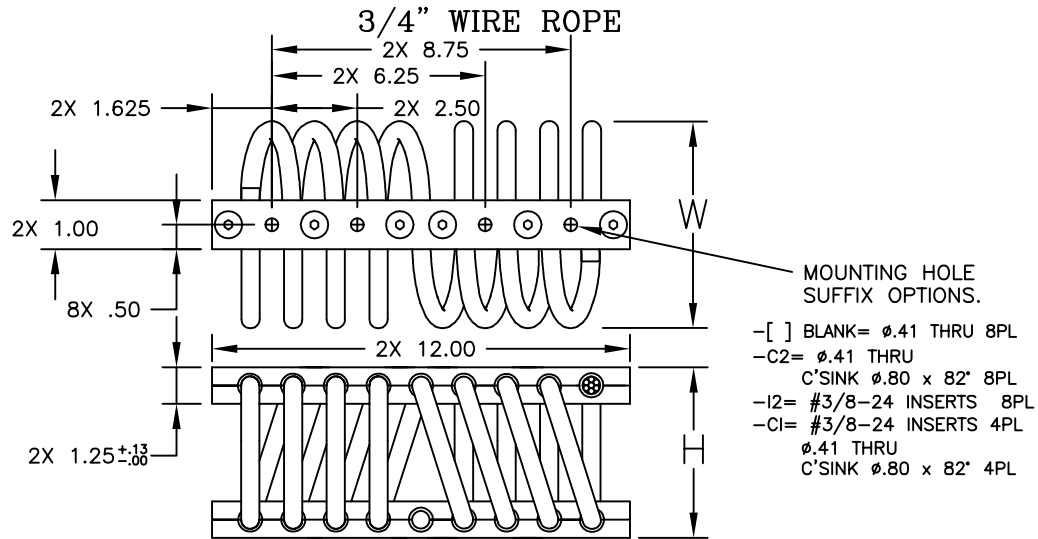

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H ±.25	W(REF)				
CB1600-12-[]	4.00	4.25	COMPRESSION SHEAR/ROLL 45 DEG. C/R	10900 4950 5700	25200 5500 14700	1.20 1.20 1.70
CB1600-17-[]	4.40	4.65	COMPRESSION SHEAR/ROLL 45 DEG. C/R	7250 3375 4500	16800 3750 10500	1.40 1.40 2.10
CB1600-20-[]	4.80	5.55	COMPRESSION SHEAR/ROLL 45 DEG. C/R	5100 2250 2700	11760 2500 7500	1.80 1.80 2.70
CB1600-30-[]	5.20	6.25	COMPRESSION SHEAR/ROLL 45 DEG. C/R	2600 1580 2100	7800 1750 4800	2.20 2.20 3.10
CB1600-40-[]	5.50	6.75	COMPRESSION SHEAR/ROLL 45 DEG. C/R	2100 1000 1500	5050 1125 3300	2.40 2.40 3.50
CB1600-70-[]	6.50	8.50	COMPRESSION SHEAR/ROLL 45 DEG. C/R	700 330 610	1350 380 1280	3.20 3.20 4.40

NOTES

1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL CB1600 SERIES
 WIRE ROPE ISOLATOR**



THE VMC GROUP
 The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION