


REV.	DESCRIPTION	DATE	BY

CB2000 SERIES

1-1/4" WIRE ROPE

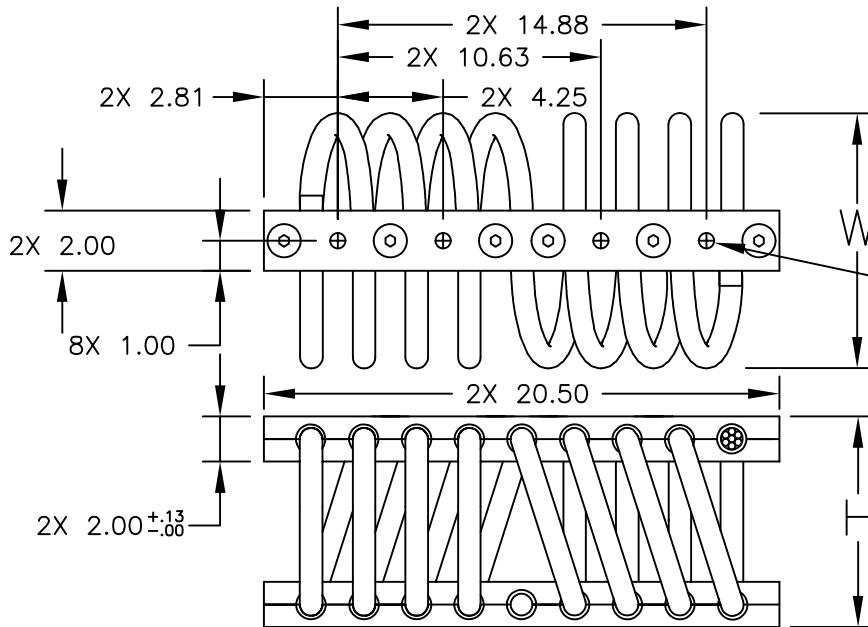

- MOUNTING HOLE SUFFIX OPTIONS.
- [] BLANK= ϕ .78 THRU 8PL
 - C2= ϕ .78 THRU
C'SINK ϕ 1.44 x 82' 8PL
 - T2= #3/4-10 TAP 8PL
 - CT= #3/4-10 TAP 4PL
 ϕ .78 THRU
C'SINK ϕ 1.44 x 82' 4PL
- * INSERTS ARE NOT AVAILABLE FOR THE LARGER SERIES ISOLATORS

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .25	W(REF)				
CB2000-10-[]	7.00	8.00	COMPRESSION	10000	18600	2.00
			SHEAR/ROLL	5100	5000	2.20
			45 DEG. C/R	4500	12000	3.20
CB2000-12-[]	8.50	9.50	COMPRESSION	5900	12000	3.20
			SHEAR/ROLL	2900	3000	3.20
			45 DEG. C/R	3200	8000	4.00

NOTES

1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL CB2000 SERIES
WIRE ROPE ISOLATOR**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION: