


CB2200 SERIES

1-1/2" WIRE ROPE

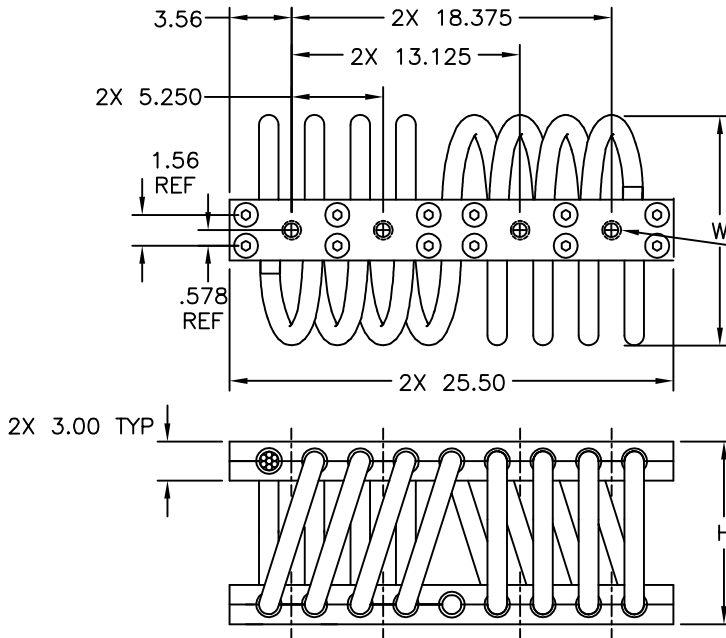

MOUNTING HOLE SUFFIX OPTIONS.

- [] BLANK= ϕ .95 THRU 8PL
- C2= ϕ .95 THRU
C'SINK ϕ 1.77 x 82' 8PL
- I2= #7/8-9 TAP 8PL
- CT= #7/8-9 TAP 4PL
 ϕ .95 THRU
C'SINK ϕ 1.77 x 82' 4PL
- TM2= M22X2.5 TAP 8PL

* INSERTS ARE NOT AVAILABLE FOR THE LARGER SERIES ISOLATORS

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .25	W(REF)				
CB2200-10-[]	10.50	12.00	COMPRESSION	7295	13440	5.10
			SHEAR/ROLL	4545	3620	4.10
			45 DEG. C/R	4540	8075	5.60
CB2200-20-[]	13.00	15.00	COMPRESSION	3300	5515	7.30
			SHEAR/ROLL	1970	1380	6.10
			45 DEG. C/R	1750	4335	8.40
CB2200-30-[]	15.00	18.00	COMPRESSION	2000	2950	9.00
			SHEAR/ROLL	1105	700	8.10
			45 DEG. C/R	965	2800	10.90

NOTES

- ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL CB2200 SERIES
 WIRE ROPE ISOLATOR**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION