


204R-103369 REV.: 3


REV.	DESCRIPTION	DATE	BY

MODEL NO.	MAX UNIFORM LOAD (LBS.)	DEFLECTION (IN.)	VERTICAL DYNAMIC FREQUENCY AT MAX. LOAD
MWIP 2	13000	0.10	12 HZ



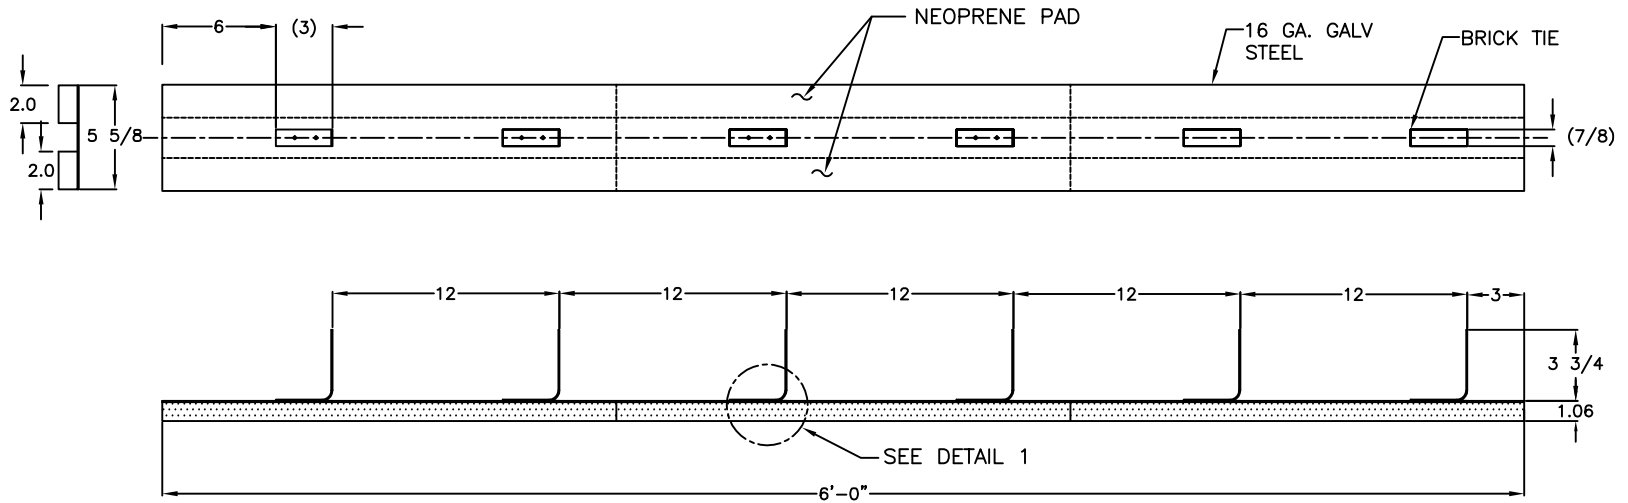

NOTES:

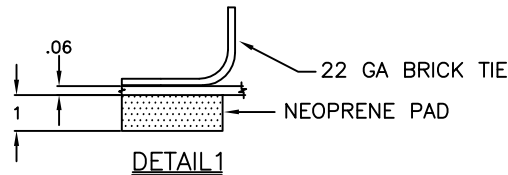1. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
2. MATERIALS: ELASTOMER-BRIDGE BEARING NEOPRENE SHEET METAL AND BRICK TIES-GALVANIZED STEEL
3. FOR LIGHTER LOADS, STIFFNESS AND DYNAMIC FREQUENCY CAN BE VARIED BY CHANGING SIZE AND LOCATION OF NEOPRENE PADS.



OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR: JOB NAME: _____ CUSTOMER : _____ CUSTOMER P.O.: _____ SALES ORDER: _____	MODEL MWIP2 13000 LBS. MASONRY WALL ISOLATION PAD	 THE VMC GROUP <i>The Power of Together</i> Bloomingdale, NJ 07403 Houston, TX 77041	SCALE : NONE	
			SHEET:	
			DRAWING NO.:	REVISION
			_____	_____