

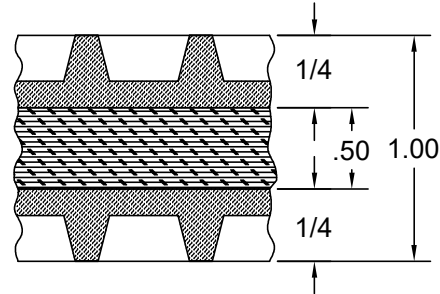


REV.	DESCRIPTION	DATE	BY

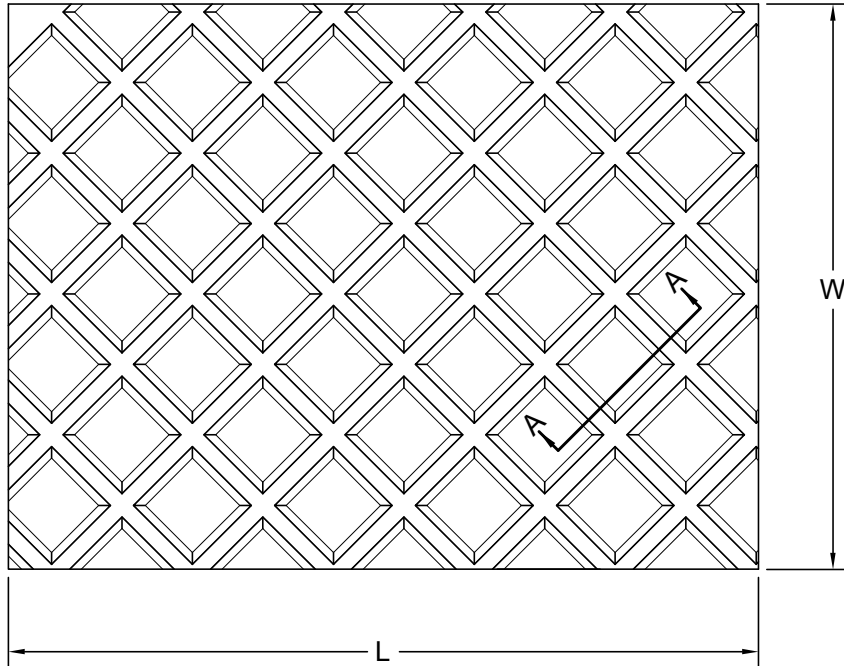

SECTION A-A
(STANDARD CAPACITY SHOWN)

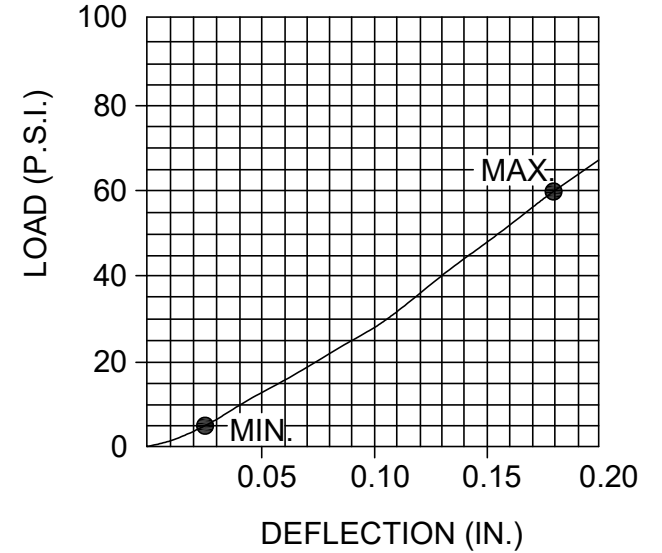

SPECIFICATIONS:

MATERIALS:

1. WAFFLE EMBOSSED SHEETS, BONDED TO 1/2" SOUND/VIBRATION ABSORBING PAD.

THICKNESS: 1"
 RECOMMENDED LOADING: 5-60 P.S.I.
 DEFLECTION: 0.025" TO 0.18"

NOTES:

- 1) AVAILABLE IN 36" X 36" SHEETS AND ALSO IN SMALLER SIZES CUT TO ORDER.

PART NUMBER	LENGTH	WIDTH	LOAD RANGE
NRC2X2	2	2	20-240
NRC3X3	3	3	45-540
NRC4X4	4	4	80-960
NRC5X5	5	5	125-1500
NRC6X6	6	6	180-2160
NRC7X7	7	7	245-2940
NRC8X8	8	8	320-3840
NRC9X9	9	9	405-4860

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL NRC 20-4860 LBS.
 ELASTOMERIC SQUARE INCH
 ISOLATION PAD



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE

SHEET: 1 OF 1

DRAWING NO.: _____ REVISION _____

