

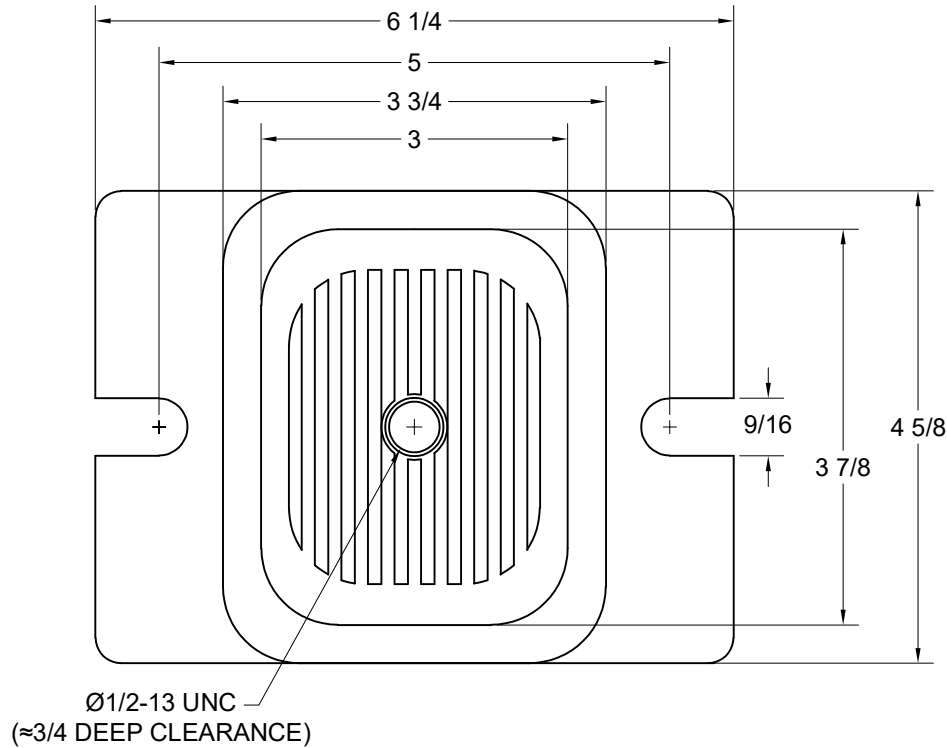


REV.	DESCRIPTION	DATE	BY

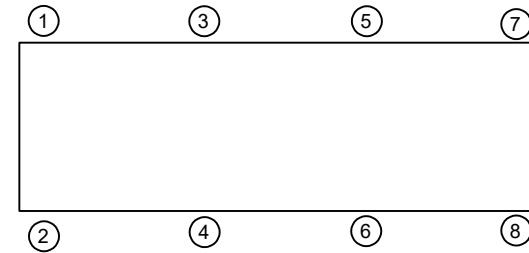

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS)	DURO ±5	DEFLECTION
114A-100313-07	R4-BLUE-WR-B	1500	35	0.25
114A-100313-08	R4-BROWN-WR-B	2250	40	0.25
114A-100313-09	R4-RED-WR-B	3000	50	0.25
114A-100313-10	R4-GREEN-WR-B	4000	60	0.25
114A-100313-11	R4-GRAY-WR-B	TBD	70	0.25
114A-100313-12	R4-PURPLE-WR-B	TBD	80	0.25

Ø1/2-13 UNC
(≈3/4 DEEP CLEARANCE)

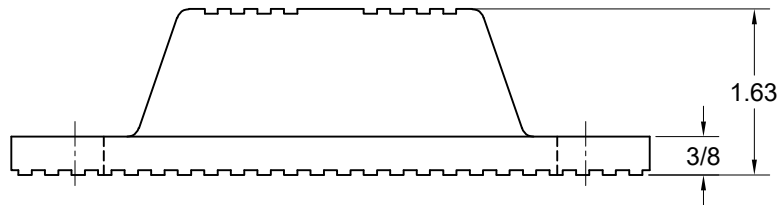

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

NOTES:

1. ALL DIMENSIONS ARE NOMINAL IN INCHES. INTERPRET PER ANSI Y14.
2. MOLDED STEEL AND ELASTOMERIC ISOLATOR FOR NON FAIL SAFE, OUTDOOR SERVICE CONDITIONS. CONTACT THE VMC GROUP FOR APPLICABILITY
3. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONTACT THE VMC GROUP FOR APPLICABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL R4 1500-4000 LBS.
DURULENE ELASTOMERIC ISOLATOR
0.25 INCH DEFLECTION**



SCALE: NONE

SHEET: _____

DRAWING NO.: _____

REVISION: _____

