


REV.	DESCRIPTION	DATE	BY

KIT PART NUMBER	CABLE LENGTH (FT.)	CABLE COLOR	MAX. TENSION ALLOWABLE (LBS.)	KIT TYPE
SB-125-LRC-410	10	ORANGE	1100	9/16" SLOT / 1/2" STAKE EYE
SB-125-LRC-407	7	ORANGE	1100	9/16" SLOT / 1/2" STAKE EYE

A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD)
 B. RATING AT 45° FOR CONCRETE ATTACHMENT- 1/2" HILTI TZ @2-1/2" EMBEDMENT, 4" SLAB MIN

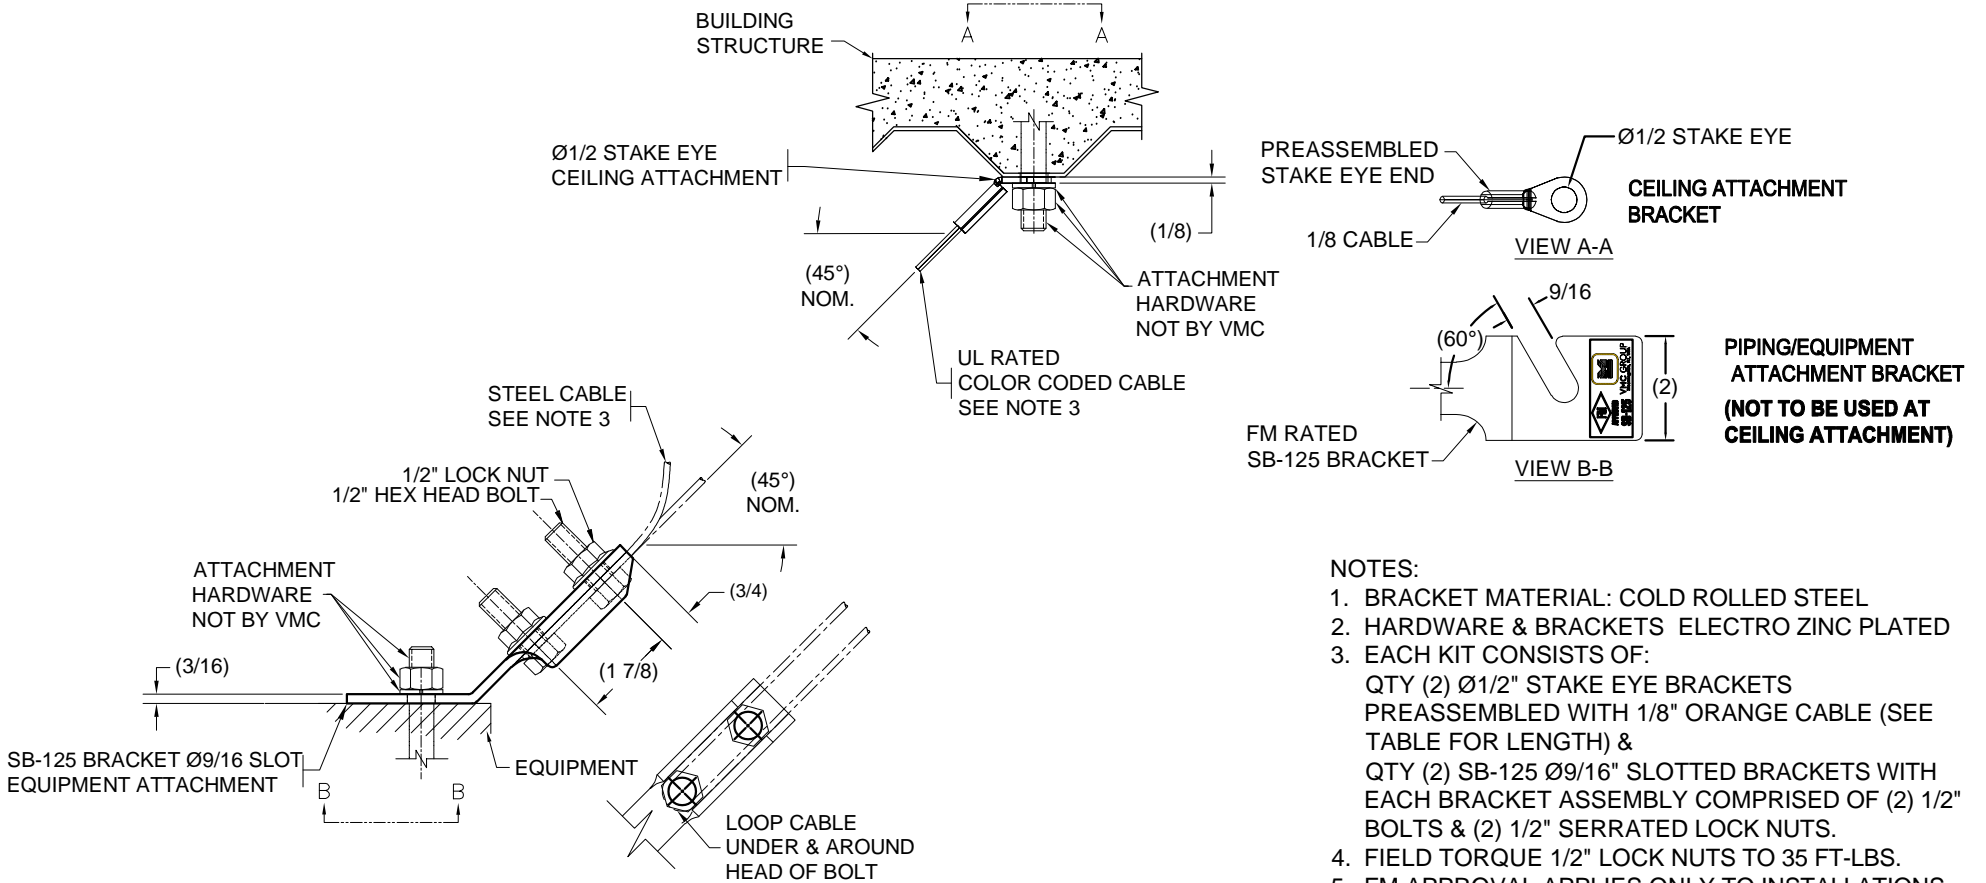

- NOTES:**
- BRACKET MATERIAL: COLD ROLLED STEEL
 - HARDWARE & BRACKETS ELECTRO ZINC PLATED
 - EACH KIT CONSISTS OF:
 QTY (2) Ø1/2" STAKE EYE BRACKETS PREASSEMBLED WITH 1/8" ORANGE CABLE (SEE TABLE FOR LENGTH) &
 QTY (2) SB-125 Ø9/16" SLOTTED BRACKETS WITH EACH BRACKET ASSEMBLY COMPRISED OF (2) 1/2" BOLTS & (2) 1/2" SERRATED LOCK NUTS.
 - FIELD TORQUE 1/2" LOCK NUTS TO 35 FT.-LBS.
 - FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL SB-125-LRC 1100 LBS.
 1/8 INCH ORANGE SEISMIC CABLE
 RESTRAINT KIT**

VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION