



216R-103755 REV.: 6 3/8/21 REV.: 6 3/8/21 REV. DESCRIPTION DATE BY

- 1. READ INSTRUCTIONS IN THEIR ENTIRETY BEFORE BEGINNING INSTALLATION.
- ISOLATORS ARE SHIPPED FULLY ASSEMBLED AND ARE TO BE POSITIONED IN ACCORDANCE WITH THE SUBMITTAL DRAWINGS OR AS OTHERWISE RECOMMENDED.
- 3. SET ISOLATORS ON FLOOR, HOUSEKEEPING PAD, OR SUB-BASE, ENSURING THAT ALL ISOLATOR CENTERLINES MATCH THE EQUIPMENT MOUNTING HOLES. THE VMC GROUP RECOMMENDS THAT THE ISOLATOR BASE ("A") BE INSTALLED ON A LEVEL SURFACE. SHIM OR GROUT AS REQUIRED, LEVELING ALL ISOLATOR BASES TO THE SAME ELEVATION (1/32-INCH MAXIMUM DIFFERENCE CAN BE TOLERATED).
- 4.DRILL HOLES AND INSTALL PER INSTALLATION CONFIGURATION ("B") SHOWN BELOW.
- 5. BOLT OR ANCHOR ALL ISOLATORS TO SUPPORTING STRUCTURE UTILIZING BASE THRU HOLES ("B").
- 6. REMOVE TOP BOLT AND TOP WASHER. PLACE EQUIPMENT ON TOP OF ISOLATORS SO THAT MOUNTING HOLES IN EQUIPMENT OR BASE LINE UP WITH THREADED HOLE ("C").
- 7. REINSTALL TOP BOLT AND WASHER AND TIGHTEN DOWN.
- 8. INSTALLATION IS COMPLETE.

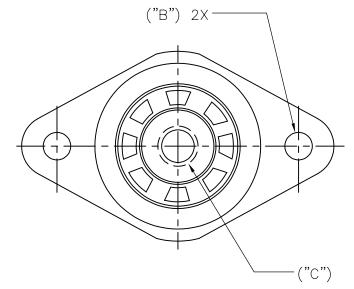

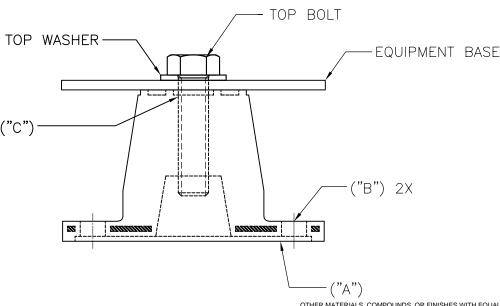

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

•		D	TI		D		\sim	D	
•	ᆮ	К		ᇉ	u	Г'	u	К	. =

SALES ORDER:

JOB NAME: _____CUSTOMER:

CUSTOMER P.O.:

MODEL RVD 45-2400 LBS. ELASTOMERIC ISOLATOR 0.38-0.48 INCH DEFLECTION



THE POWER OF TOGETHER

Bloomingdale, NJ 07403
Houston, TX 77041

NONE	Member	
SHEET:	··· ··············	

DRAWING NO.: REVISION