


REV.	DESCRIPTION	DATE	BY

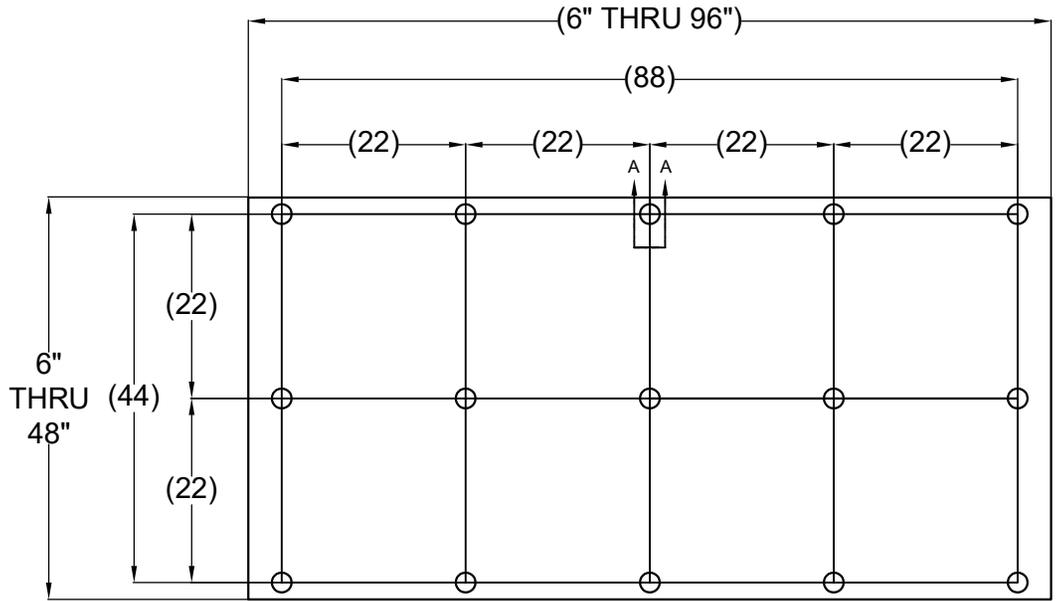


4 x 8 PANEL LAYOUT SHOWN

ELASTOMERIC ELEMENT					
MOUNT TYPE	ISO LOAD (LBS)	DEFLECTION (IN)	COLOR	"W"	"H"
RE-A △	35	0.40	BLUE	1-3/4	1-1/4
	45		BLACK		
	75		RED		
	120		GREEN		
RE-B △	170	0.50	BLACK	2-3/8	1-11/16
	240		RED		
	380		GREEN		
	550		GRAY		
RE-C ⊗	380	0.50	BLACK	3	2-1/8
	520		RED		
	840		GREEN		
	1070		GRAY		
	2000		BLUE		

NOTE: ELASTOMERIC MOUNT TYPE MAY VARY.

- NOTES:
1. 4' X 8' IS STANDARD PANEL SIZE.
 2. PANEL SHAPE MAY VARY BASED ON CUSTOMER REQUIREMENTS.
 3. DIMENSIONS MAY VARY PER CUSTOMER REQUIREMENTS.
 4. ALL DIMENSIONS IN INCHES.
 5. ADDITIONAL LOADS AVAILABLE. CONTACT VMC FOR AVAILABILITY.
 6. DURULENE WEATHER RESISTANT MOUNT AVAILABLE. CONTACT VMC FOR AVAILABILITY.
 7. ELEMENT COLOR: SOLID PER COLOR CODE.
 8. ELEMENT COLOR: SOLID BLACK WITH COLOR CODED DOT ON SIDE OF ELEMENT.

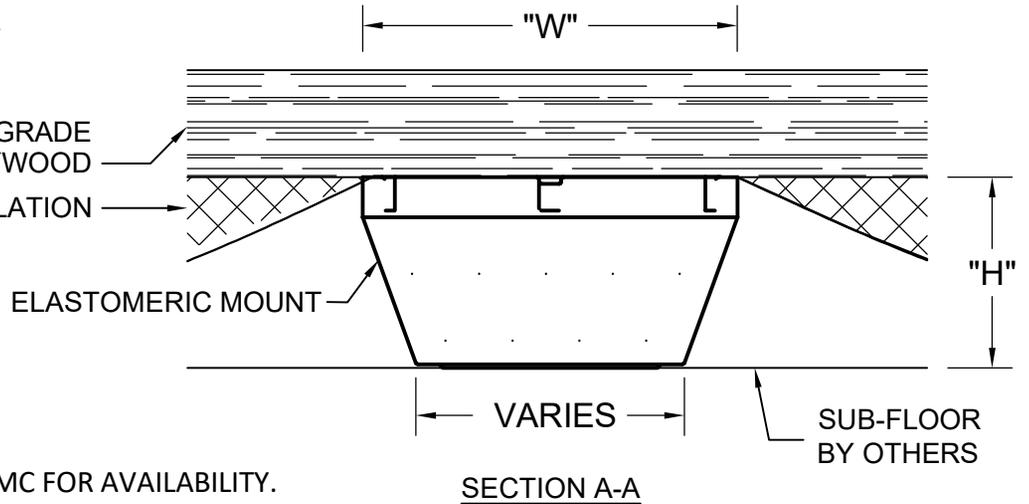

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL QFFN 35-2000 LBS.
ISOLATED FLOATING FLOOR WITH
ELASTOMERIC ISOLATOR**


VMC GROUP
THE POWER OF TOGETHER™
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE: NONE	Member VISCMA
SHEET:	
DRAWING NO.:	REVISION

REV.	DESCRIPTION	DATE	BY

INSTRUCTIONS:

1. SUB FLOOR TO BE LEVEL, SMOOTH & CLEAR OF CLEAR DEBRIS(B.O.)
2. INSTALL PERIMETER ISOLATION AROUND THE AREA THE PANEL WILL BE PLACED (B.O.)
3. PLACE QFFN PANEL SNUGLY AGAINST EACH OTHER PER LAYOUT.
4. INSTALL WATER PROOFING AND OVERLAP 1' (B.O.)
5. INSTALL REBAR IF NEEDED AS PART OF PROJECT REQUIREMENT.(B.O)
6. POUR CONCRETE ON TO ALL PANELS. (B.O)
7. INSTALL MASTIC SEAL ON TOP OF THE PERIMETER BOARDS.(B.O)
8. FINISHED: UNLESS FINISH FLOOR IS REQUIRED.
9. SLAB DESIGN & CONSTRUCTION IS BY OTHERS NOT VMC

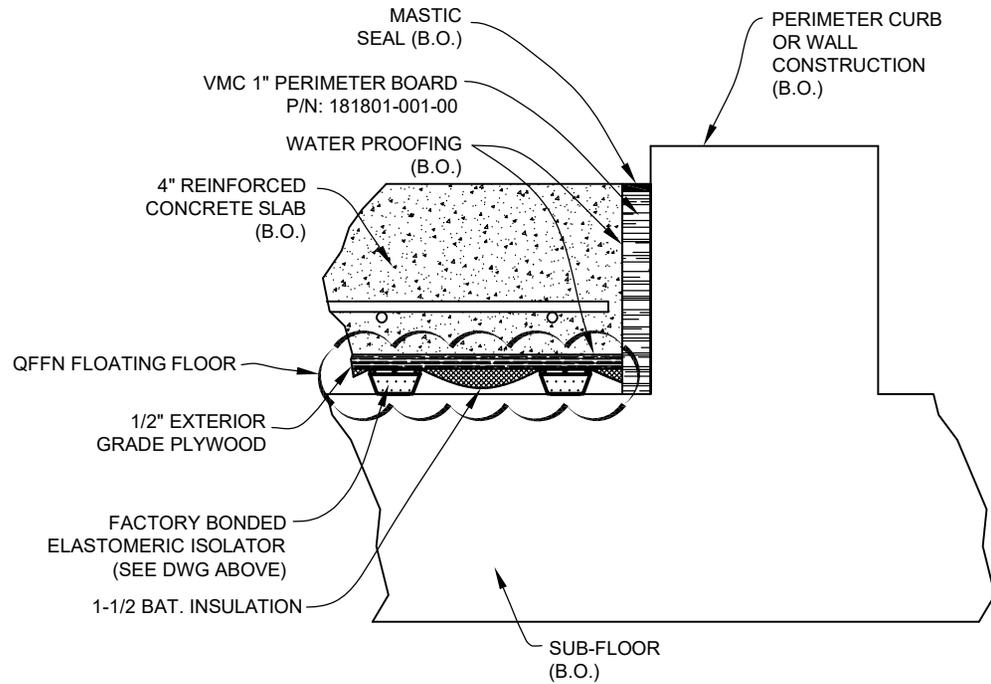

**QFFN FLOATING FLOOR
INSTALLATION DETAIL**

NOTE:

B.O. = BY OTHERS NOT BY VMC

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL QFFN 35-2000 LBS.
ISOLATED FLOATING FLOOR WITH
ELASTOMERIC ISOLATOR**



**VMC
GROUP**

THE POWER OF TOGETHER™

Bloomington, NJ 07403
Houston, TX 77041

SCALE:	NONE	
SHEET:		
DRAWING NO.:		REVISION