


212R-103794 REV.: 2

REV.	DESCRIPTION	DATE	BY



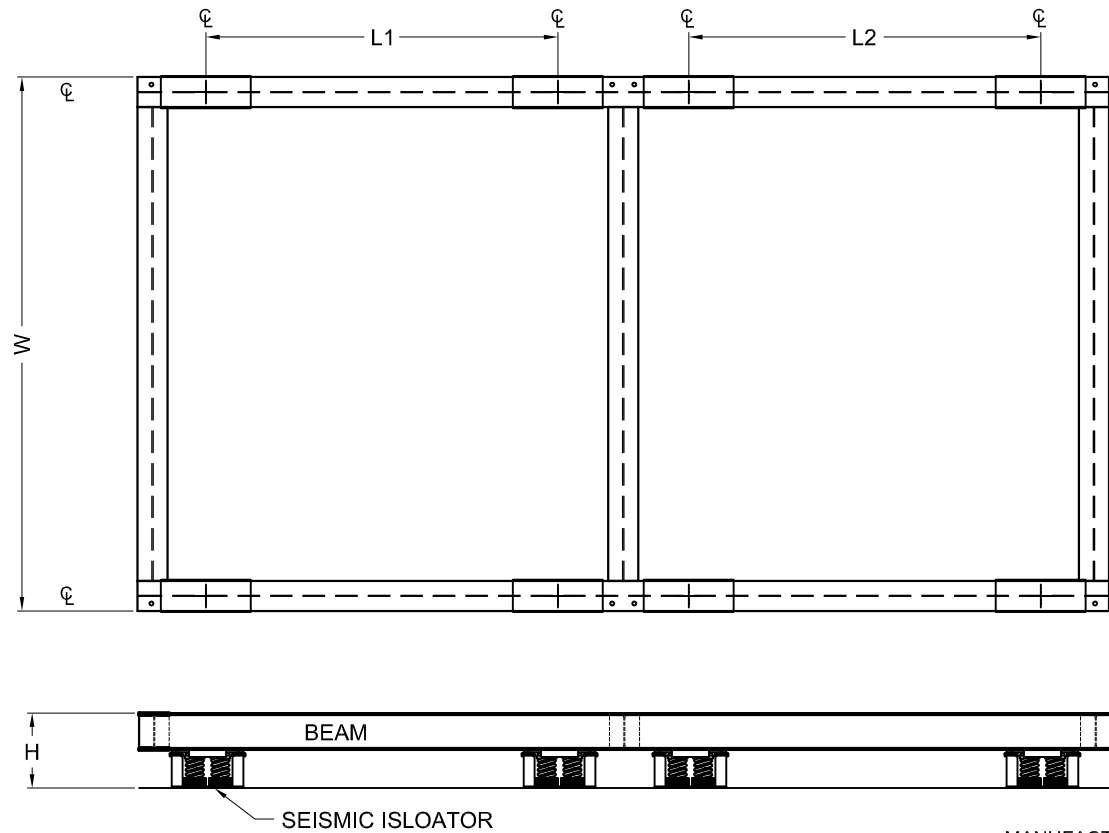

NOTES

1. HEIGHT OF PRODUCT VARIES PER MOUNT.
2. CLEARANCE UNDERNEATH THE UNIT VARIES PER FRAME CONSTRUCTION.
3. LENGTH AND WIDTH VARIES PER APPLICATION DEMANDS OR PRODUCT CONSTRUCTION.
4. METHOD OF FRAME OR BASE ATTACHMENT TO ISOLATORS MAY VARY PER FRAME OR MOUNT.
5. MOUNT ILLUSTRATION MAY VARY PER APPLICATION OR PROJECT REQUIREMENTS.
6. ANCHORING OR BOLT DOWN REQUIREMENTS VARY PER MOUNT OR PROJECT REQUIREMENTS.
7. INSTALLATION INSTRUCTIONS VARY PER MOUNT OR PROJECT REQUIREMENTS; CONTACT MANUFACTURER FOR INSTALLATION INSTRUCTIONS.
8. CUSTOM CUT LENGTH AND WIDTH AVAILABLE; CONTACT VMC FOR AVAILABILITY.
9. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.

MANUFACTURER: _____
 MODEL NUMBER: _____
 OPERATING WEIGHT: _____

TAG: CT-1, -2
 (1) BASE(S) REQ'D
 FRAME WEIGHT: 1250 LBS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR: JOB NAME: _____ CUSTOMER : _____ CUSTOMER P.O.: _____ SALES ORDER: _____	MODEL STEEL DUNNAGE PLATFORM NON-SEISMIC 3 INCH DEFLECTION	 THE VMC GROUP <i>The Power of Together</i> Bloomingdale, NJ 07403 Houston, TX 77041	SCALE : NONE	
			SHEET:	